




1 INSTANTANEOUS WATER HEATER (THERMOSTATIC TYPE)
NO SCALE

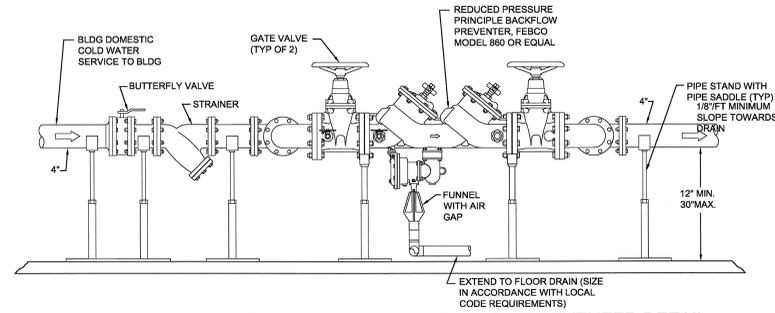


2 REDUCED PRESSURE PRINCIPLE BACKFLOW PREVENTER DETAIL
NO SCALE

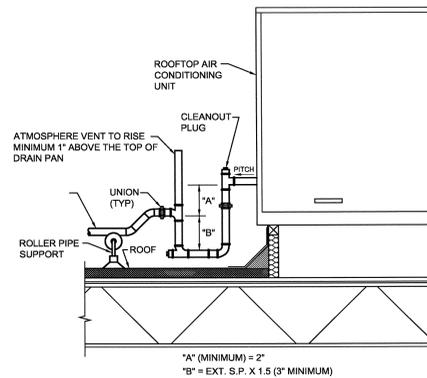


3 ROOFTOP UNIT CONDENSATE DRAINAGE DETAIL
NO SCALE

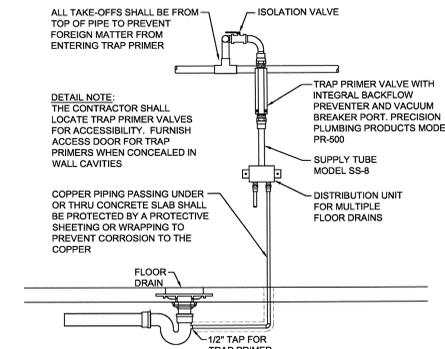


4 TYPICAL TRAP PRIMER DETAIL
NO SCALE

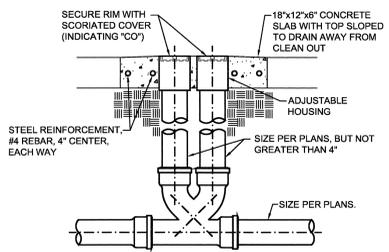


5 TWO-WAY GRADE CLEANOUT DETAIL
NO SCALE

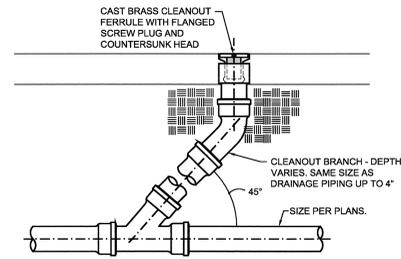


6 FLOOR CLEANOUT DETAIL
NO SCALE

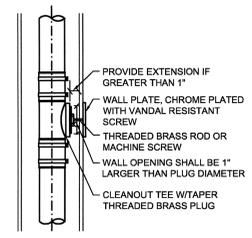

7 WALL CLEANOUT DETAIL
NO SCALE

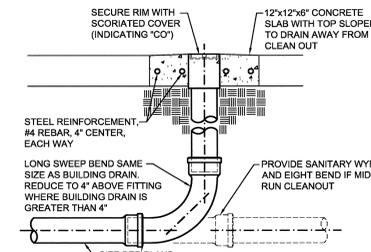


8 GRADE CLEANOUT DETAIL
NO SCALE

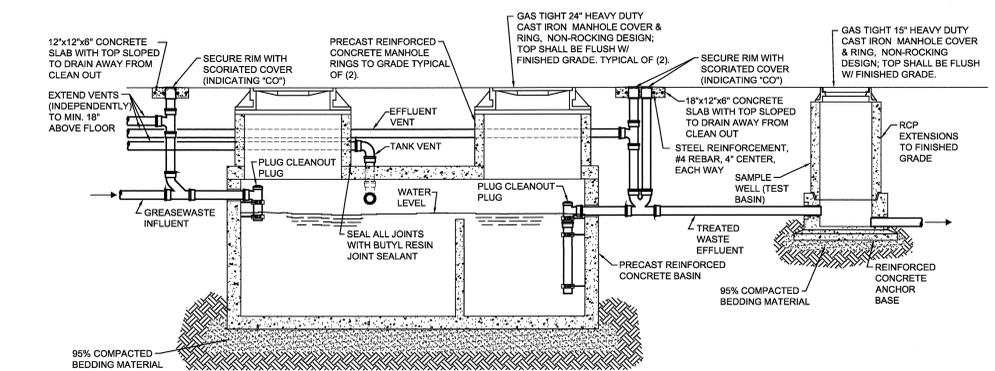

9 GREASE INTERCEPTOR DETAIL (GIS1)
NO SCALE

INTERCEPTOR NOTES

1. SEAL ALL PIPE PENETRATIONS WATER TIGHT
2. COAT INTERIOR OF BASIN WITH (2) COATS OF POLYURETHANE
3. REFER TO PLANS FOR PIPE SIZES, INVERT ELEVATIONS AND ROUTING
4. SECONDARY COMPARTMENT HAS VOLUME EQUAL TO 1/3 OF TOTAL CAPACITY
5. ALL PIPE AND FITTINGS SHALL BE CAST IRON
6. WALLS AND BOTTOM SHALL BE REINFORCED THROUGHOUT WITH 2x6, #10 MESH
7. COVER SHALL BE REINFORCED LONGITUDINALLY WITH NO. 8 REBAR ON 6\"/>
- 8. GREASE INTERCEPTOR SHALL MEET THE APPROVAL OF LOCAL AUTHORITY.
- 9. MAX. 10'-0\"/>
- 10. ALL CONSTRUCTION SHALL CONFORM TO H-20 LIVE LOAD LOADING.
- 11. INTERCEPTOR WALLS AND BOTTOM SLAB SHALL BE DESIGNED FOR AN EQUIVALENT FLUID SOIL PRESSURE OF 40 PSF, INCLUDING TRUCK LOADING SURCHARGE NOTED IN NOTE 10 ABOVE.

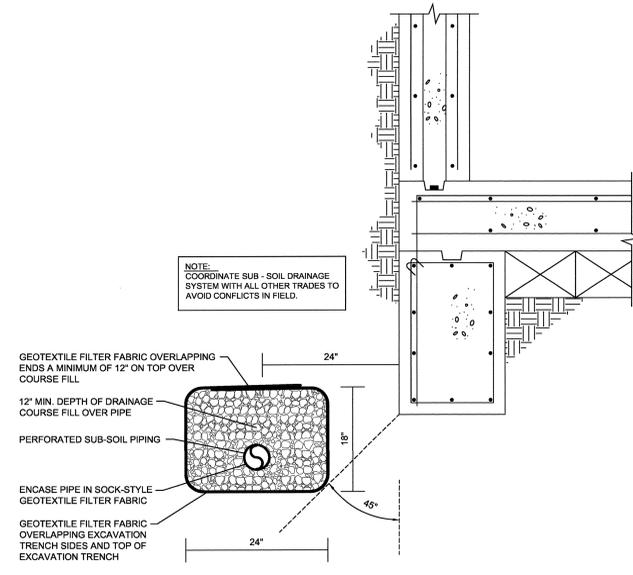

10 SUB-SURFACE DRAINAGE SYSTEM - FOUNDATION DRAIN
NO SCALE