



COLLIN COUNTY, TEXAS

ADDENDUM No. One (1)

IFB No. 2018-336

INVITATION FOR BID
FOR

CONSTRUCTION, MYERS PARK ROADWAY IMPROVEMENTS

DATE: October 15, 2018

NOTICE TO ALL PROSPECTIVE OFFERORS:

YOU ARE HEREBY DIRECTED TO MAKE CHANGES TO THE INVITATION FOR BID IN ACCORDANCE WITH THE ATTACHED INFORMATION.

DELETE: Sheets 3-4, 6-8, and 18
REPLACE WITH: Revised sheets 3-4, 6-8, and 18 to address new driveway and to clarify the concrete flume bid item and quantity.

DELETE: Section 004100 Contract Bid Schedule
REPLACE WITH: Section 004100 Contract Bid Schedule – Addendum No. 1

ADD: Mandatory Pre-bid attendance sheets

ADD: Construction sequence map

PLEASE NOTE ALL OTHER TERMS, CONDITIONS, SPECIFICATIONS DRAWINGS, ETC. REMAIN UNCHANGED.

SINCERELY,
MICHALYN RAINS, CPPO, CPPB
PURCHASING AGENT

SUMMARY OF ROADWAY ITEMS																		
ITEM DESCRIPTION	PREPARING ROW	EXCAVATION (ROADWAY)	EMBANKMENT (FINAL) (ORD COMP) (TY B)	FL BS (CMP IN PLC) (TY D GR 1-2) (6")	REINF CONC PVMT (6")	RIPRAP (CONC) (4 IN)	RIPRAP (STONE COMMON) (DRY) (18 IN)	RIPRAP (STONE) (COLORADO RIVER ROCK 4"-8") (SPECIAL)	RIPRAP (CONC) (FLUME) 	PIPE RAIL	DOUBLE PIPE RAIL	CONC CURB (INTEGRAL)	CONC CURB & GUTTER (SLOTTED)	CONC WHEEL STOP	CONC SIDEWALKS (4")	CURB RAMPS (TY 7)	INSTALL GATE	REMOVE GATE
	STA	CY	CY	SY	SY	SY	CY	CY	CY	LF	LF	LF	LF	EA	SY	EA	EA	EA
PARK ROAD "A"																		
BEGIN TO STA 4+00	3	341	0	534														
STA 4+00 TO STA 8+00	4	335	3	53	 1350		 7		2			341					1	1
STA 8+00 TO STA 12+00	4	120	356		826													
STA 12+00 TO END	3.21	174	70		597												1	1
PARK ROAD "B"																		
BEGIN TO STA 5+00	2.91	65	49		517												1	1
STA 5+00 TO STA 9+00	4	187	109		565													
STA 9+00 TO END	2.37	137	10		361													
PARK ROAD "C"																		
BEGIN TO STA 6+00	3	235	7		1232									1	16			
STA 6+00 TO END	0.21	38	0		58													
PARK ROAD "D"																		
BEGIN TO STA 7+00	3	185	27		582												1	1
7+00 TO END	3.46	154	55		614												1	
PARK ROAD "E"																		
BEGIN TO STA 8+00	3	145	47		469													
STA 8+00 TO END	1.25	22	4		253													
PARK ROAD "F"																		
BEGIN TO STA 9+00	2.88	110	24		558												1	1
STA 9+00 TO STA 13+00	4	90	78		739													
STA 13+00 TO STA 17+00	4	153	35		708													
STA 17+00 TO STA 21+00	4	52	48		712													
STA 21+00 TO END	4.26	196	144		760												1	1
PARKING LOT - WEST		297	218		2941		 28		2	313	88	754			15	1	1	
PARKING LOT - EAST		276	98		 4214	173	 59	31	3	397	75	1059	98	2				
PROJECT LAYOUT DETAIL "A"		 6			 33													
PROJECT TOTAL	56.55	 3,316	1,384	587	 18,089	173	 94	31	7	710	163	2,154	98	3	31	1	8	6

SUMMARIES

ROADWAY

COLLIN COUNTY, TEXAS

PROJECT No. 17006-00

DATE: 10/12/2018

SCALE: AS SHOWN

DESIGNED BY: CCC

DRAWN BY: CCC

CHECKED BY: CCC



MYERS PARK



CIVIL CONSULTING GROUP

TEXAS REGISTERED ENGINEERING FIRM NO. F-9356

1575 HERITAGE DRIVE, STE. 308
 COLLEEN, TEXAS 75006
 P 972.569.3193 F 972.569.9197



Seal of the State of Texas
 10/12/18

10/15/18

NO.	BY	DATE
A	REVISION	TLC
ADDENDUM NO. 1		10/15/18

FILENAME: ...\\01_General\\CCMP*QTY02.dgn
PLOTTED: 10/12/2018

SUMMARY OF REMOVAL ITEMS							
ITEM DESCRIPTION	REMOVING CONC (PAV)	SALV, HAUL & STKPL RCL APH PV (0 TO 2")	REMOV STR (PIPE)	REMOV STR (FENCE)	REMOVE STR (RAIL)	TREE REMOVAL (24" - 30" DIA)	TREE REMOVAL (36" - 42" DIA)
	SY	SY	LF	LF	LF	EA	EA
PARK ROAD "A"							
BEGIN TO STA 4+00							
STA 4+00 TO STA 8+00		1000			336		
STA 8+00 TO STA 12+00		742	40			1	
STA 12+00 TO END		489					1
PARK ROAD "B"							
BEGIN TO STA 5+00		378					
STA 5+00 TO STA 9+00		413					
STA 9+00 TO END		351					
PARK ROAD "C"							
BEGIN TO STA 6+00		1298					
STA 6+00 TO END		50					
PARK ROAD "D"							
BEGIN TO STA 7+00			26				
7+00 TO END			36				
PARK ROAD "E"							
BEGIN TO STA 8+00							
STA 8+00 TO END			30				
PARK ROAD "F"							
BEGIN TO STA 9+00		824	51				
STA 9+00 TO STA 13+00		745					
STA 13+00 TO STA 17+00		809	30				
STA 17+00 TO STA 21+00		806					
STA 21+00 TO END		706					
PARKING LOT - WEST	19	2845		51	336		
PARKING LOT - EAST	17	4539		66	385		
PROJECT LAYOUT DETAIL "A"	△ 8						
PROJECT TOTAL	△ 44	15,995	213	117	1,057	1	1

BARRICADES, SIGNS, AND TRAFFIC HANDLING	
ITEM DESCRIPTION	BARRICADES, SIGNS AND TRAFFIC HANDLING
	MO
MYERS PARK	6
PROJECT TOTAL	6

SUMMARY OF DRAINAGE ITEMS							
LOCATION	CMP (GAL STL 18 IN)	CMP (GAL STL 24 IN)	CMP (GAL STL 30 IN)	CMP (GAL STL 42 IN)	CMP (GAL STL 48 IN)	CMP (GAL STL 15 IN)	SET (TY II) (24 IN) (CMP) (6: 1) (C)
	LF	LF	LF	LF	LF	LF	EA
PARK ROAD "A"							
CULVERT A1			156				
CULVERT F1A	56						
PARK ROAD "D"							
DRIVEWAY CULVERT	28						
CULVERT D1					124		
PARK ROAD "E"							
CULVERT E1						40	
PARK ROAD "F"							
CULVERT F1		58					2
CULVERT F2	44						
CULVERT F3				22			
PROJECT TOTAL	128	58	156	22	124	40	2

PAVEMENT MARKING SUMMARY						
LOCATION	REFL PAV MRK TY II (W) 4" (SLD)	PAV SURF PREP FOR MRK (4")	ELIM EXT PAV MRK & MRKS (4")	REFL PAV MRK TY II (W) (SYMBOL)	PAV SURF PREP FOR MRK (SYMBOL)	INSTALL SMALL ROADSIDE SIGN ASSM
	LF	LF	LF	EA	EA	EA
PARK ROAD "A"						
STA 4+00 TO STA 8+00	509	509		1	1	1
PARK ROAD "C"						
BEGIN TO STA 6+00	520	520		1	1	1
PARKING LOT - WEST						
PARKING LOT - EAST	2086	2086				
	4036	3738	298			
PROJECT TOTAL	7,151	6,853	298	2	2	2

PROJECT No. 17006.00
DATE: 10/12/2018
SCALE: AS SHOWN
DESIGNED BY: CCG
DRAWN BY: CCG
CHECKED BY: CCG

1575 HERITAGE DRIVE, STE. 308
MCKINNEY, TEXAS 75069
P 972.569.9193 F 972.569.9197
TEXAS REGISTERED ENGINEERING FIRM NO. F-9356

CIVIL CONSULTING GROUP




STATE OF TEXAS
TREVOR L. CASTILLA
85405
Professional Engineer
10/12/18

MYERSPARK

SUMMARIES
MISCELLANEOUS

4

COLLIN COUNTY, TEXAS

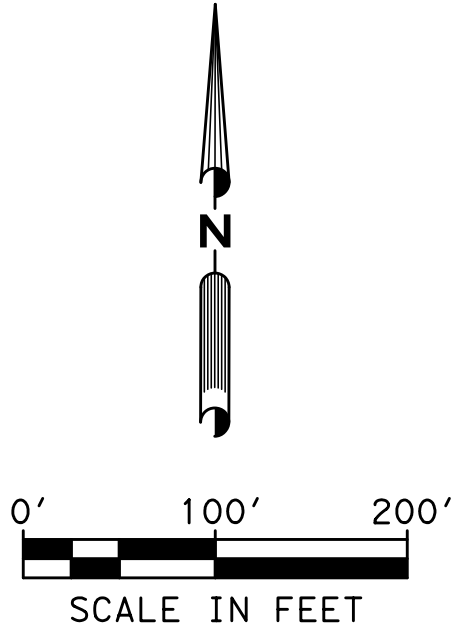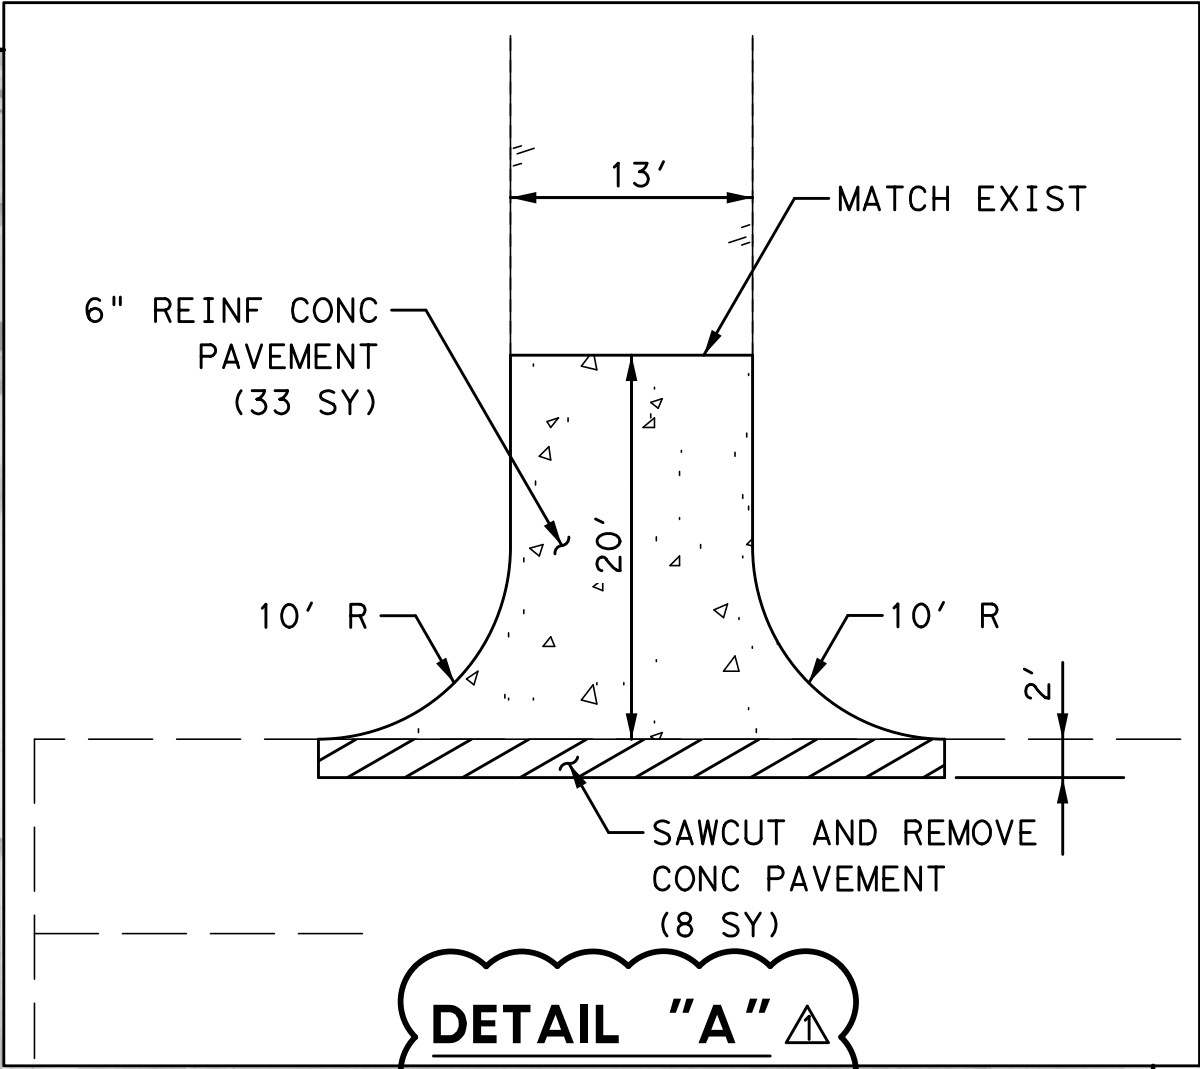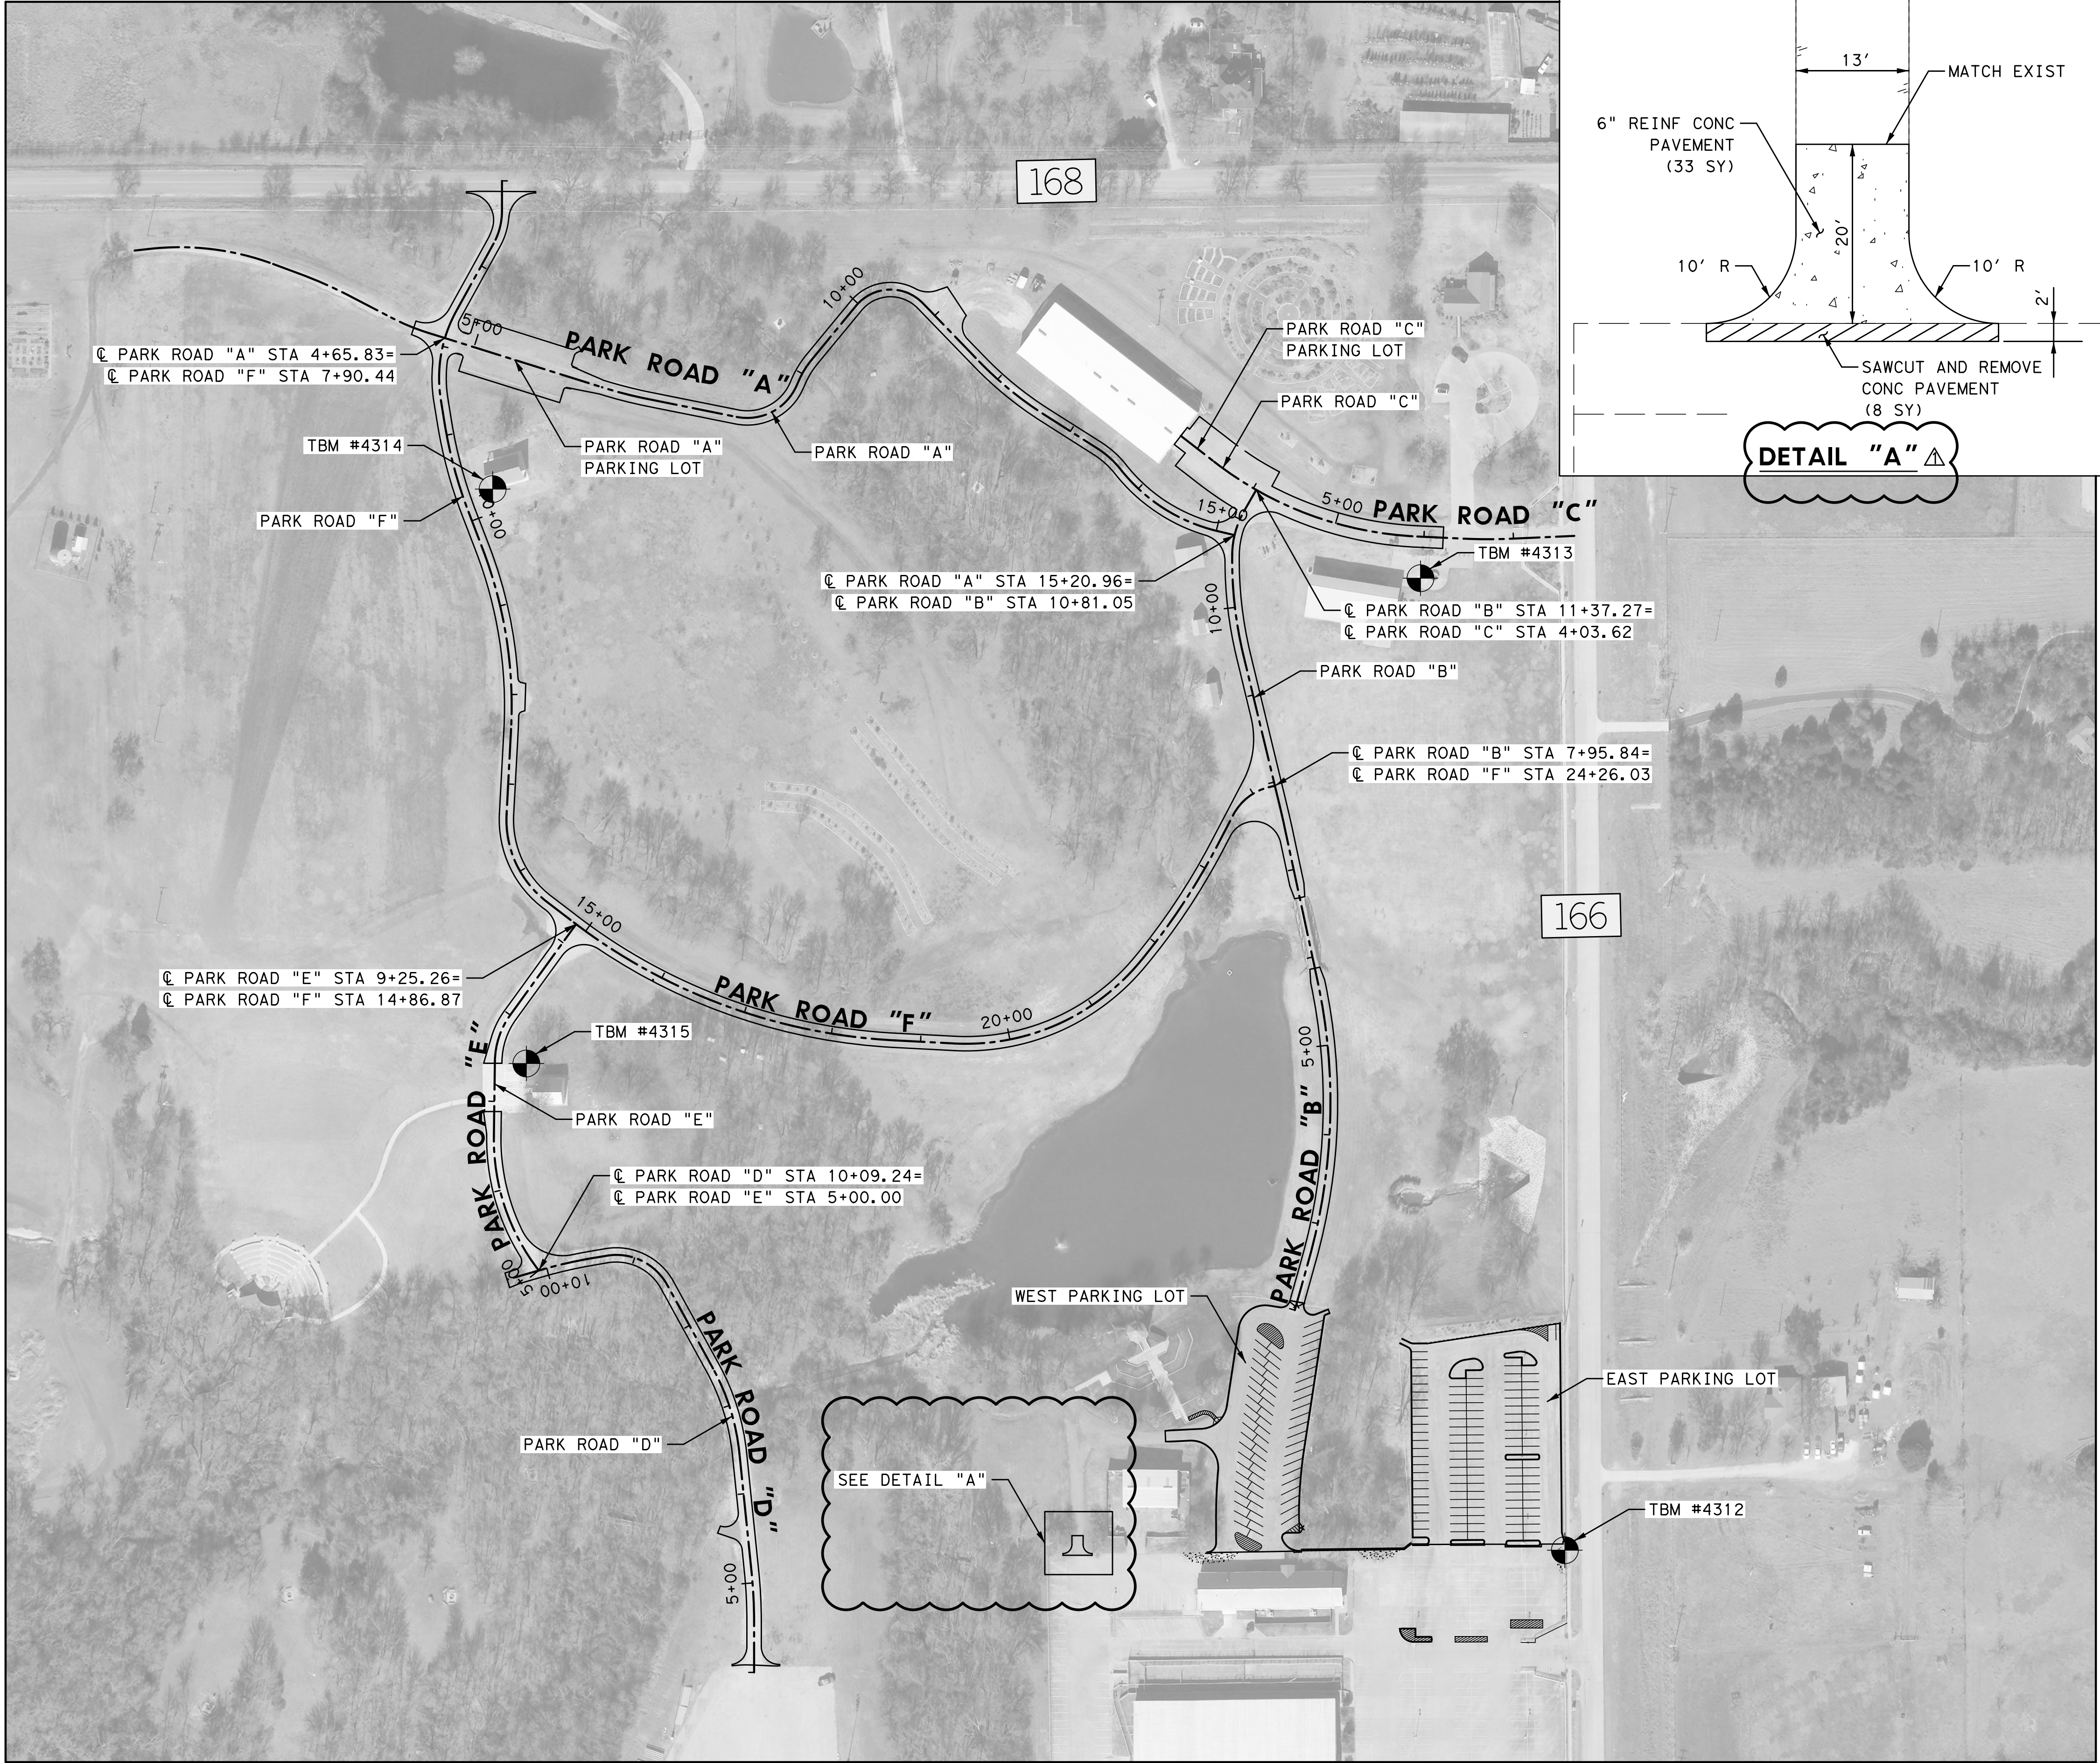

LEGEND

TEMPORARY BENCHMARK

NOTES:

1. ELEVATIONS AND COORDINATES (SURFACE) ARE BASED ON THE CITY OF MCKINNEY GPS MONUMENT No(s). 24 AND 29.

BENCHMARKS:

TBM #4312:
MAG NAIL SET AT THE SOUTHWESTERLY CORNER OF A STORM DRAIN INLET, IN THE WESTERLY LINE OF A SIDEWALK IN THE WESTERLY LINE OF COUNTY ROAD No. 166, AND BEING 257.6' NORTHEAST FROM THE NORTHEAST CORNER OF A ONE-STORY METAL BUILDING. ELEV.=694.20' N=7,151,627.14 E=2,525,144.04

TBM #4313:
MAG NAIL SET AT THE SOUTHWESTERLY END OF CONCRETE PAVING NEAR THE BASE OF A WINDMILL, AND BEING APPROXIMATELY 171' WEST OF THE WESTERLY BACK OF CURB FOR COUNTY ROAD No. 166. ELEV.=688.94' N=7,152,712.19 E=2,524,982.96

TBM #4314:
MAG NAIL SET AT THE SOUTHWESTERLY END OF CONCRETE PAVING AND BEING APPROXIMATELY 333' SOUTH OF THE SOUTHERLY EDGE OF ASPHALT PAVING FOR COUNTY ROAD No. 168. ELEV.=715.51' N=7,152,811.68 E=2,523,947.29

TBM #4315:
MAG NAIL SET AT THE NORTHEASTERLY CORNER OF A SMALL CONCRETE PARKING LOT, WITH FOUR HANDICAPPED PARKING SPACES AND BEING APPROXIMATELY 1174' WEST OF THE WESTERLY BACK OF CURB FOR COUNTY ROAD No. 166. ELEV.=700.45' N=7,152,170.49 E=2,523,984.88

NO.	REVISION	BY	DATE
1	TLC		10/15/18

1575 HERITAGE DRIVE, STE. 308
MCKINNEY, TEXAS 75069
P 972.569.9193 F 972.569.9197
TEXAS REGISTERED ENGINEERING FIRM NO. F-9356

CIVIL CONSULTING GROUP

STATE OF TEXAS
TREVOR L. CASTILLA
85405
Professional Engineer
10/12/18

PROJECT No.	DATE	SCALE	DESIGNED BY	DRAWN BY	CHECKED BY
17006.00	10/14/2018	AS SHOWN	CCG	CCG	CCG



MYERS PARK

COLLIN COUNTY, TEXAS

PROJECT LAYOUT

6

#	NORTHING	EASTING
1	7151637.7803	2525113.9790
2	7151637.4963	2525080.9802
3	7151638.4050	2525051.9762
4	7151638.1876	2525018.9783
5	7151641.2675	2524988.9789
6	7151641.1686	2524973.9731
7	7151858.6759	2524971.0317
8	7151873.0624	2525086.9372
9	7151860.3965	2525125.1653
10	7151646.8755	2525140.9017
11	7151848.4026	2525091.0473
12	7151833.7476	2525109.3222
13	7151842.6351	2525096.2153
14	7151846.4614	2525078.4023
15	7151828.3016	2525033.3364
16	7151828.4068	2525049.3094
17	7151831.6625	2525052.2787
18	7151840.6944	2525040.7992
19	7151839.4031	2525032.3793
20	7151822.6580	2525015.6410
21	7151819.2045	2525018.6263
22	7151733.4886	2525079.6541
23	7151733.7812	2525113.6528
24	7151539.3824	2524962.4066
25	7151530.126	2524977.125
26	7151525.113	2524993.171
27	7151525.108	2524973.903
28	7151524.698	2525021.424
29	7151530.726	2525021.359
30	7151530.856	2525057.588
31	7151524.856	2525057.671
32	7151540.304	2525083.431
33	7151549.371	2525083.521
34	7151549.313	2525119.276
35	7151540.346	2525119.455

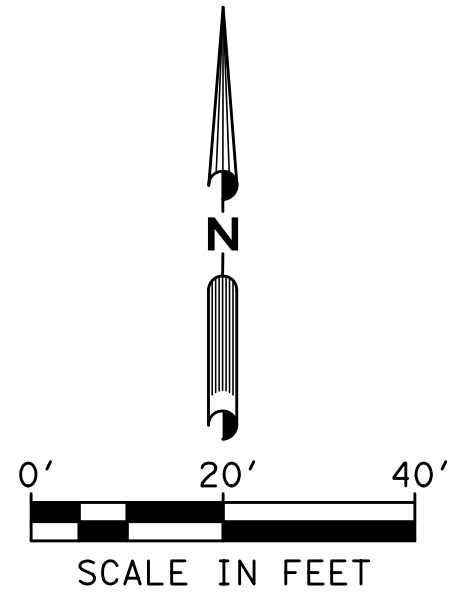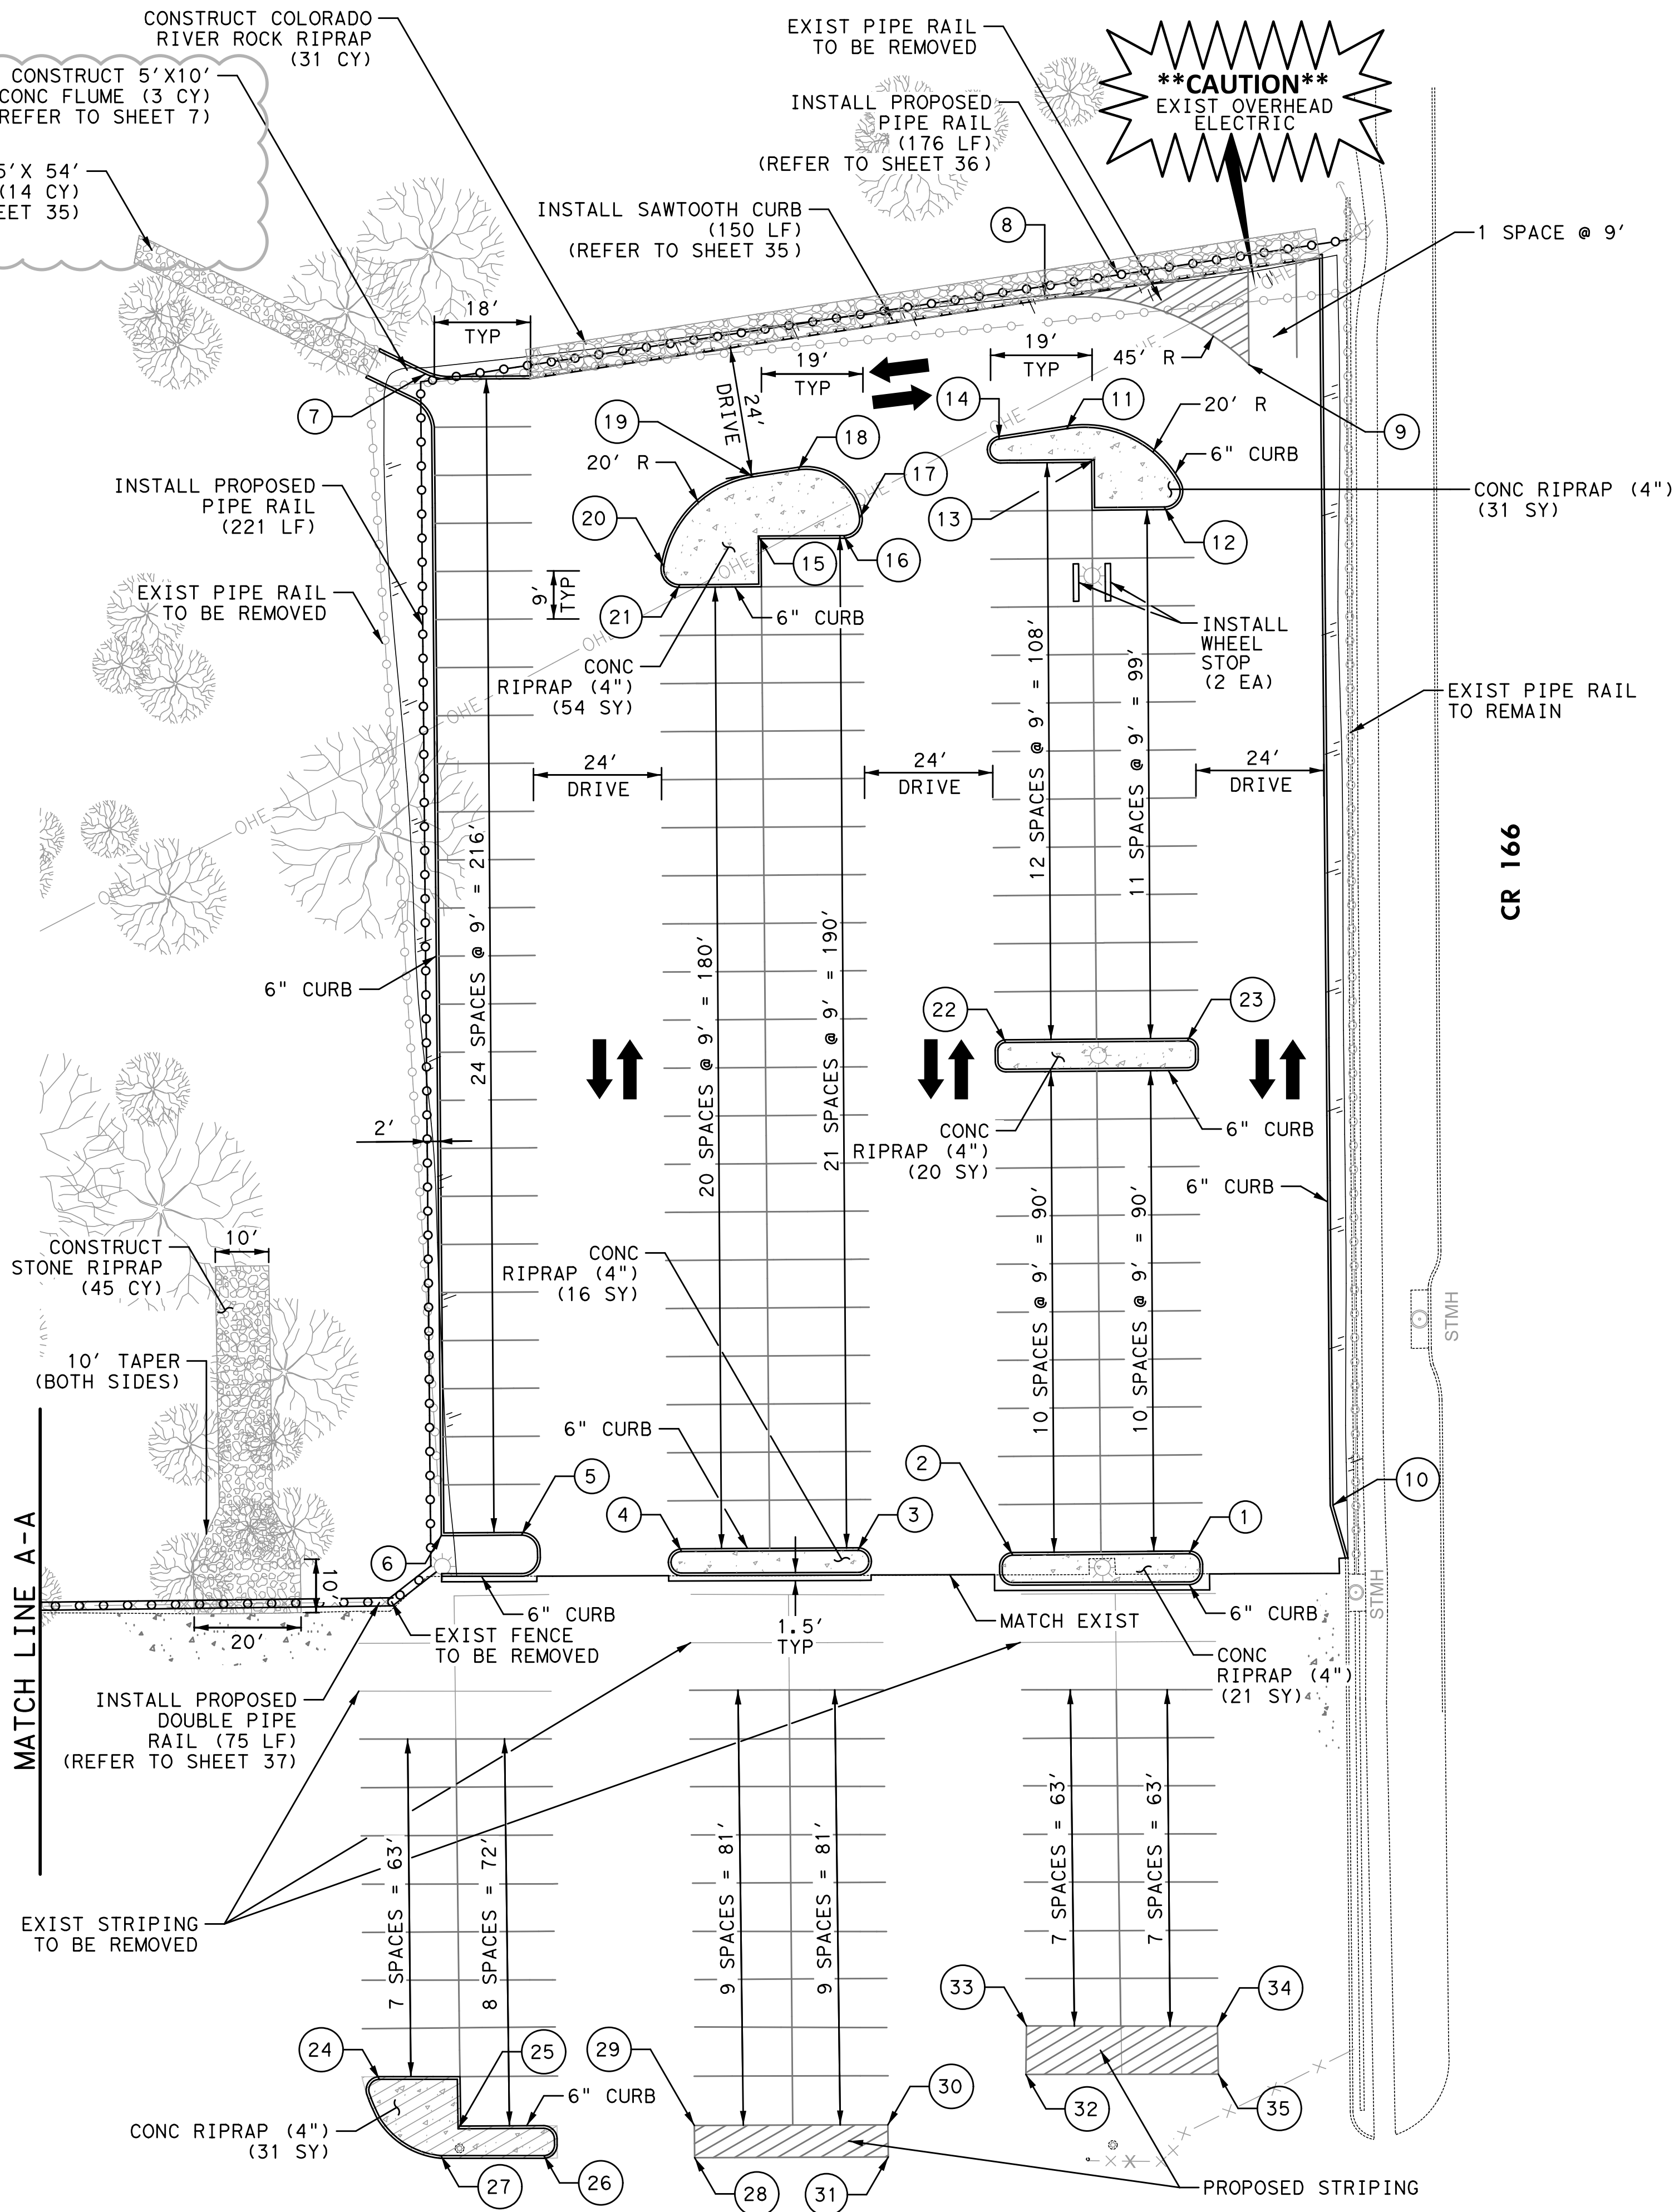

LEGEND

- EXIST ASPHALT
- STONE (DRY RIPRAP)
- COLORADO RIVER ROCK C
- CONC RIPRAP (4")
- PIPE RAIL
- DOUBLE PIPE RAIL

PROPOSED PARKING: 108 SPACES (0 HC)

- NOTES:**
- EXISTING TREES, ILLUMINATION AND ELECTRICAL CONDUITS ARE LOCATED WITHIN THE PROJECT LIMITS. CONTRACTOR SHALL VERIFY LOCATIONS, PROTECT, AND REPAIR DAMAGED ITEMS.
 - REFER TO GRADING, DRAINAGE & EROSION PLAN FOR TREE PRESERVATION AND PROTECTION PLAN.
 - CURB RADII ARE 3' UNLESS NOTED OTHERWISE.
 - ALL STANDARD PARKING STALLS SHALL BE WHITE TRAFFIC PAINT (4") IN ACCORDANCE TO THE T&MUTCD AND TEXAS ACCESSIBILITY STANDARDS.
 - THE CONTRACTOR SHALL REVIEW AND ADHERE TO THE GEOTECHNICAL REPORT PREPARED BY ALLIANCE GEOTECHNICAL GROUP, DATED NOVEMBER 2, 2017.
 - ALL COORDINATES ARE TO BACK OF CURB.
 - ALL DIMENSIONS ARE TO FACE OF CURB.

PROJECT No. 17006-00
DATE: 10/12/2018
SCALE: AS SHOWN
DESIGNED BY: CCG
DRAWN BY: CCG
CHECKED BY: CCG

1575 HERITAGE DRIVE, STE. 308
MCKINNEY, TEXAS 75069
P 972.569.9193 F 972.569.9197
TEXAS REGISTERED ENGINEERING FIRM NO. F-9356

CIVIL CONSULTING GROUP

STATE OF TEXAS
TREVOR L. CASTILLA
85405
Professional Engineer
10/12/18





MYERS PARK
COLLIN COUNTY, TEXAS

DIMENSION CONTROL & PAVING PLAN
EAST PARKING LOT


8

10/15/18	DATE
TLC	BY
ADDENDUM NO. 1	REVISION
No.	

FILENAME: ...\\COMP\\PP02.dgn
PLOTTED: 10/12/2018

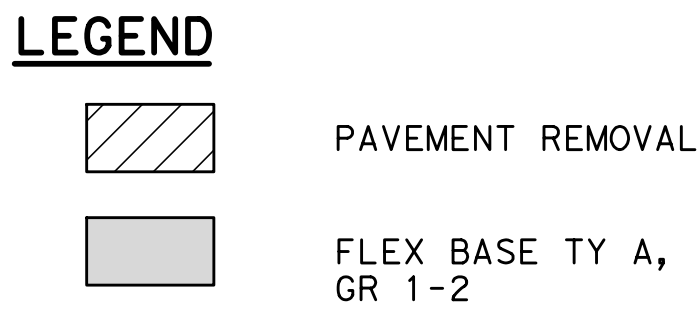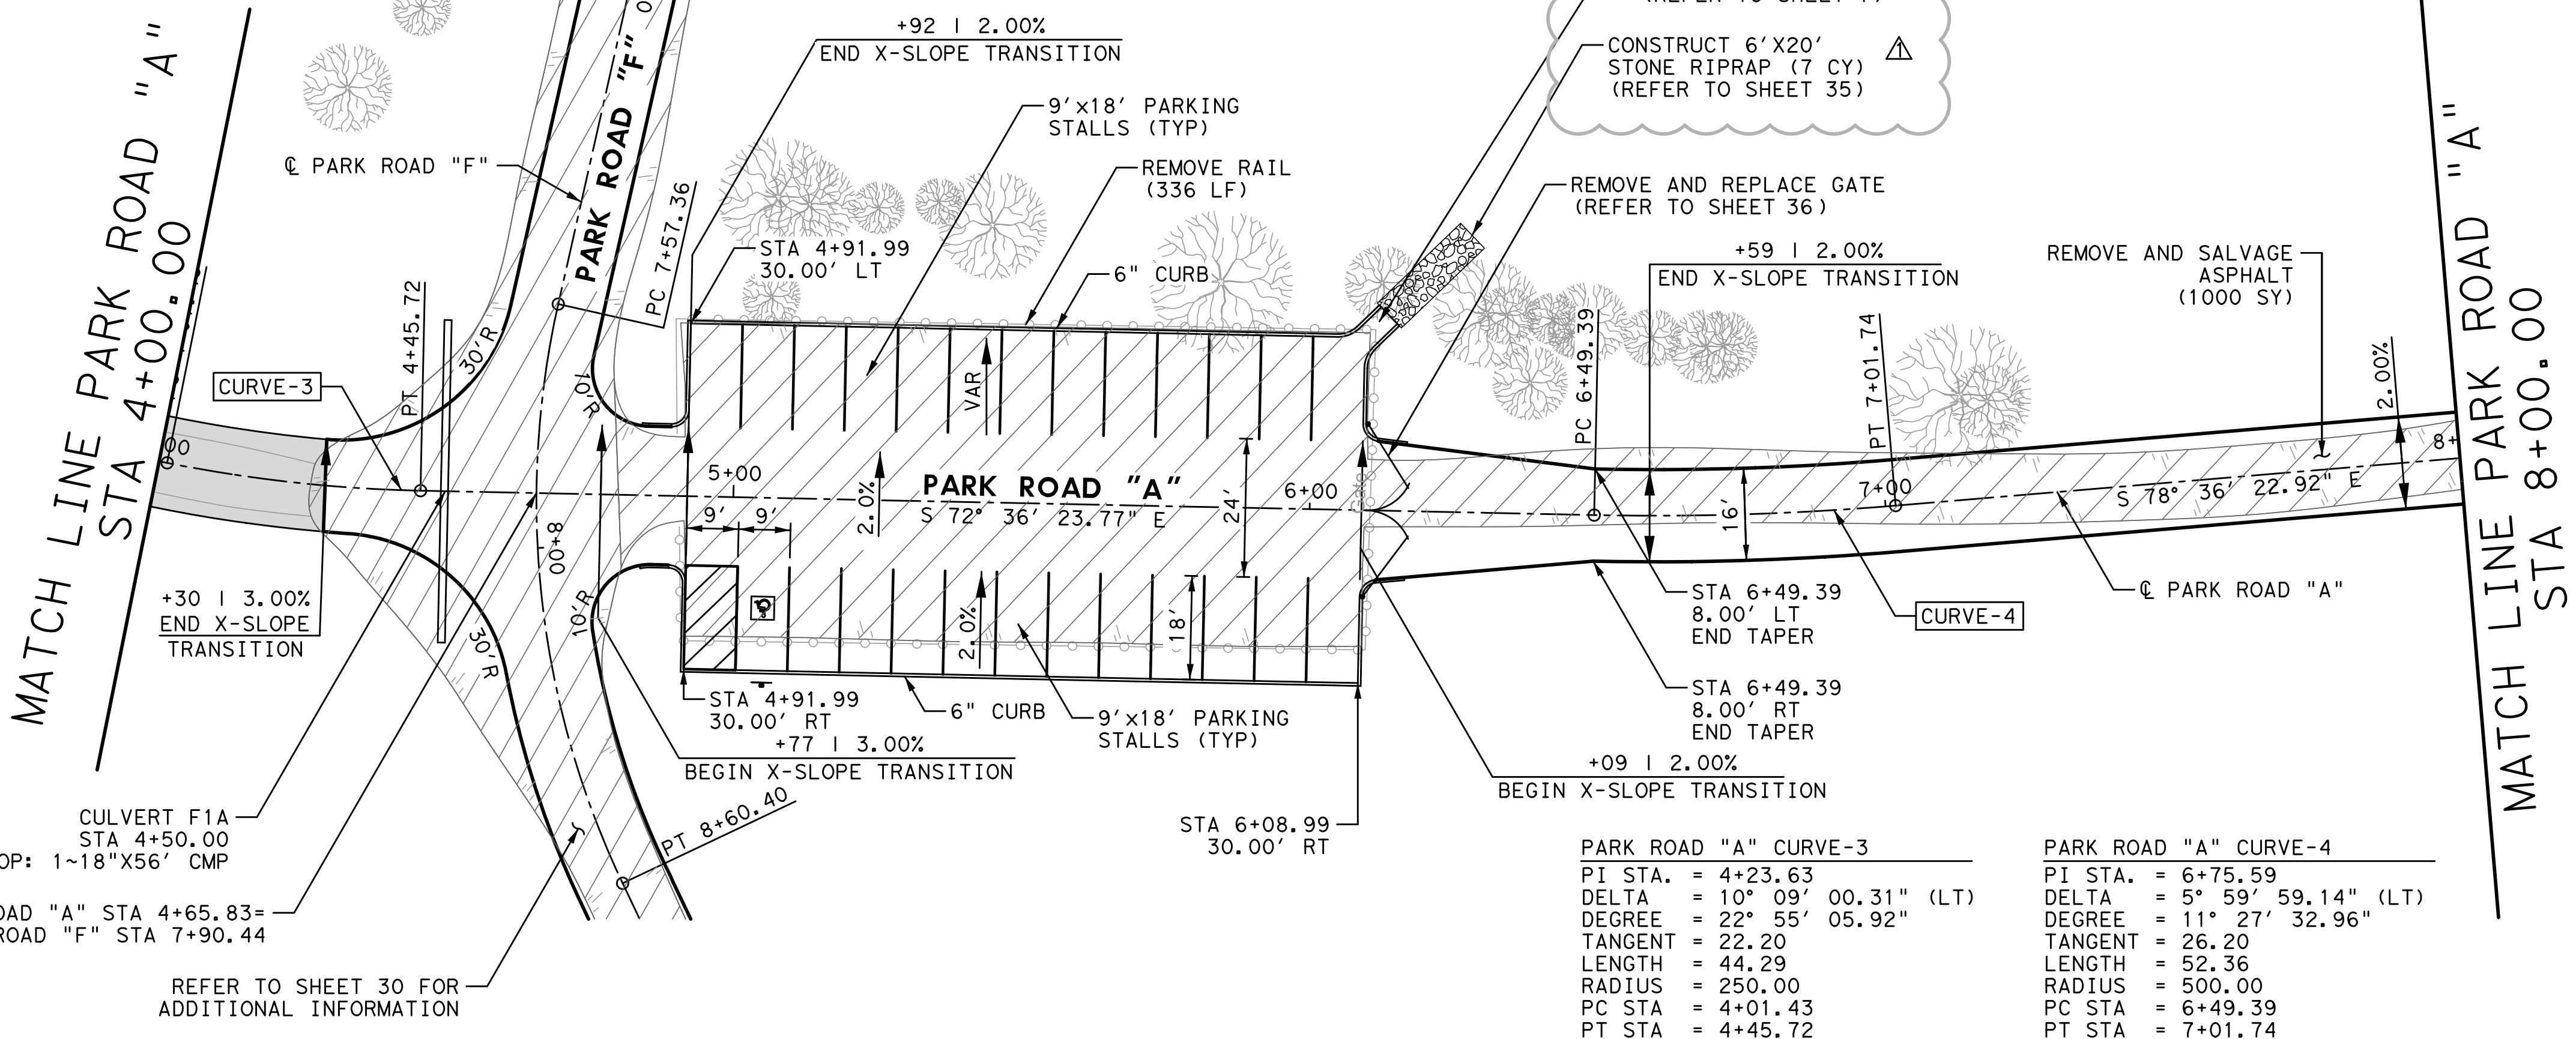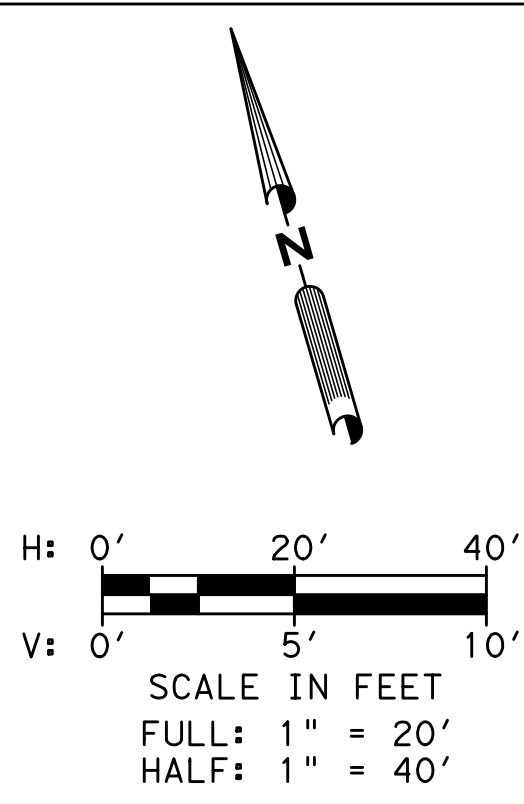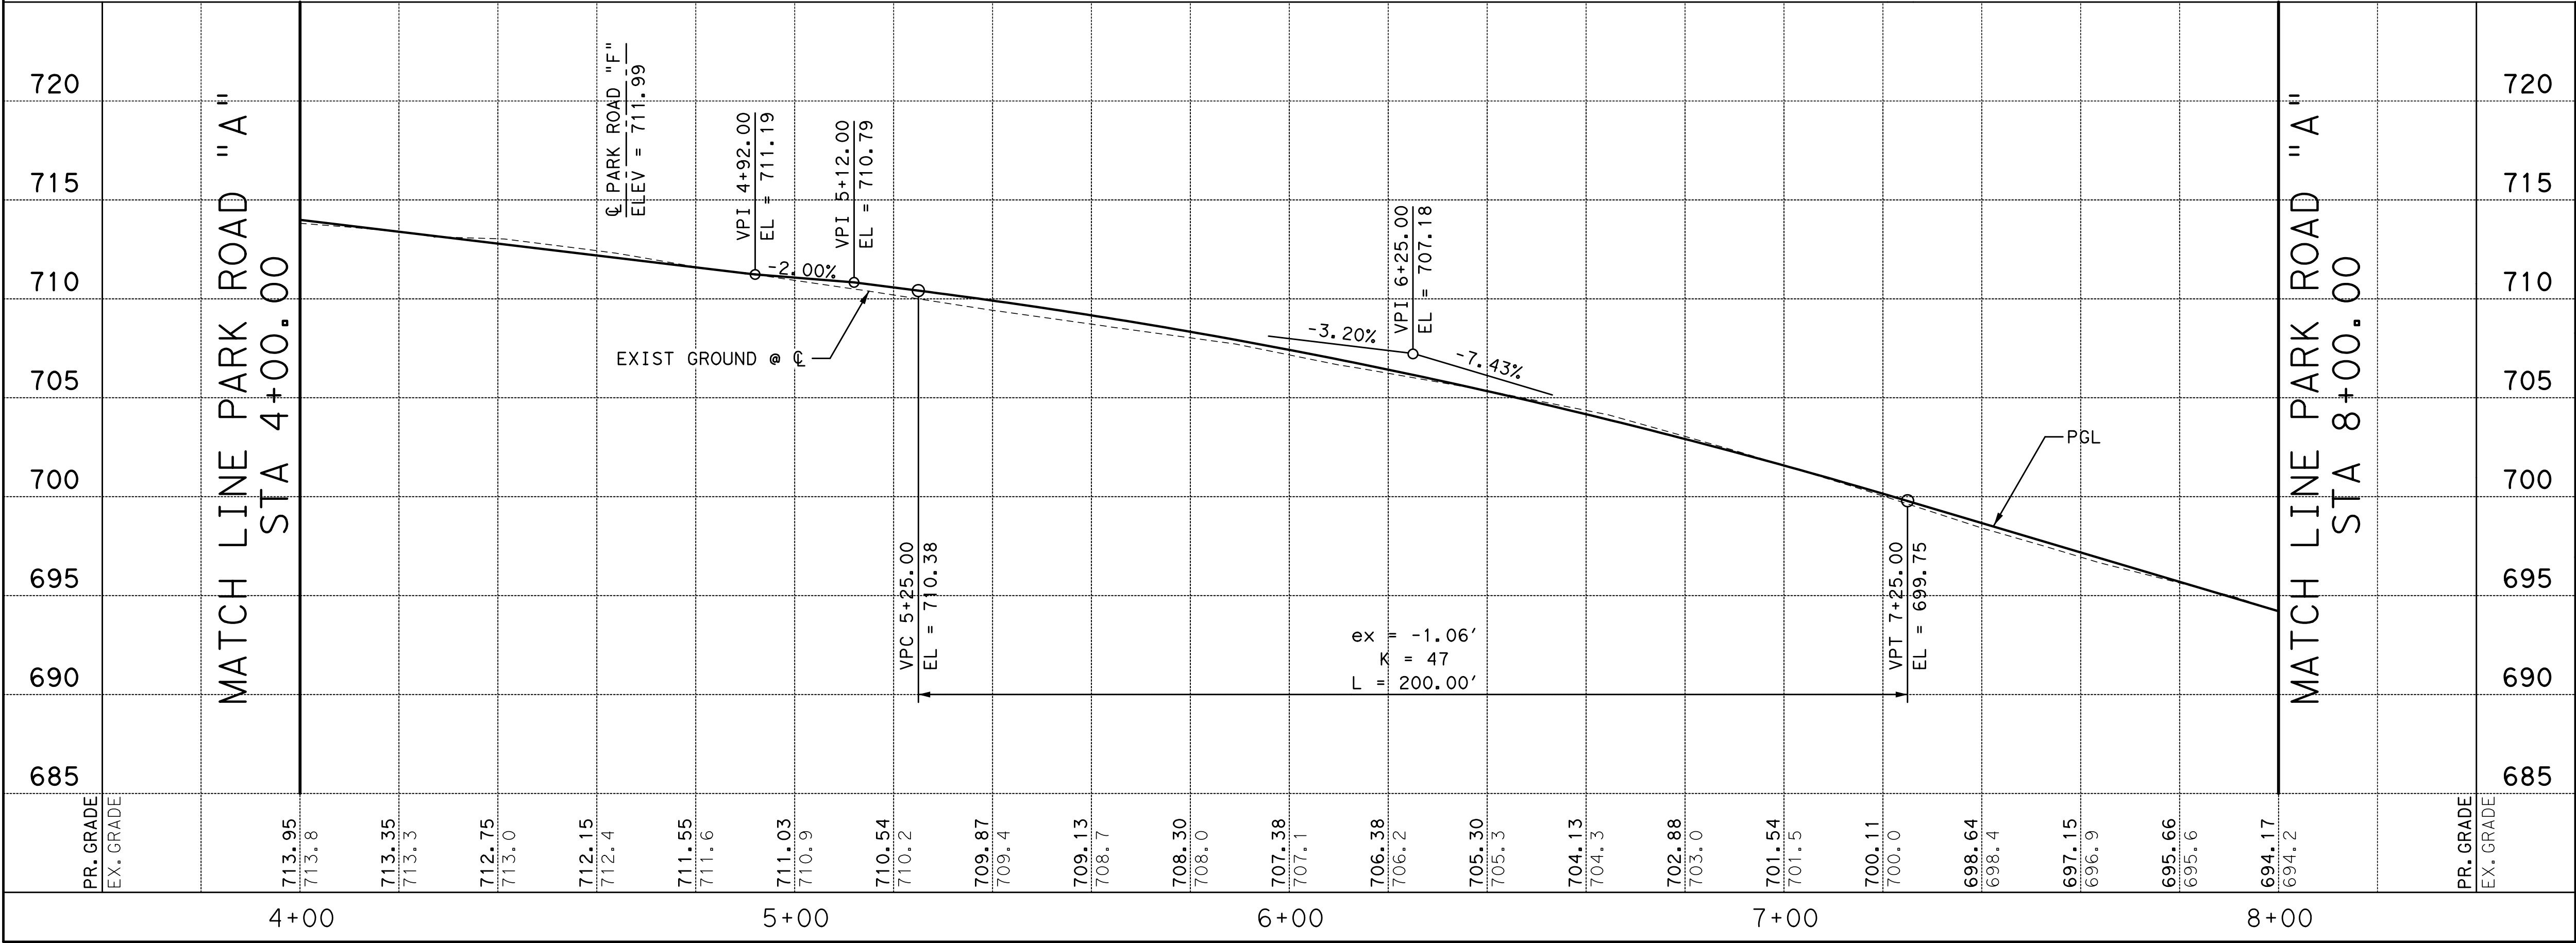

- NOTES:**
- CONTRACTOR TO VERIFY ALL UTILITIES PRIOR TO CONSTRUCTION.
 - REFER TO CULVERT PROFILES FOR ADDITIONAL INFORMATION.

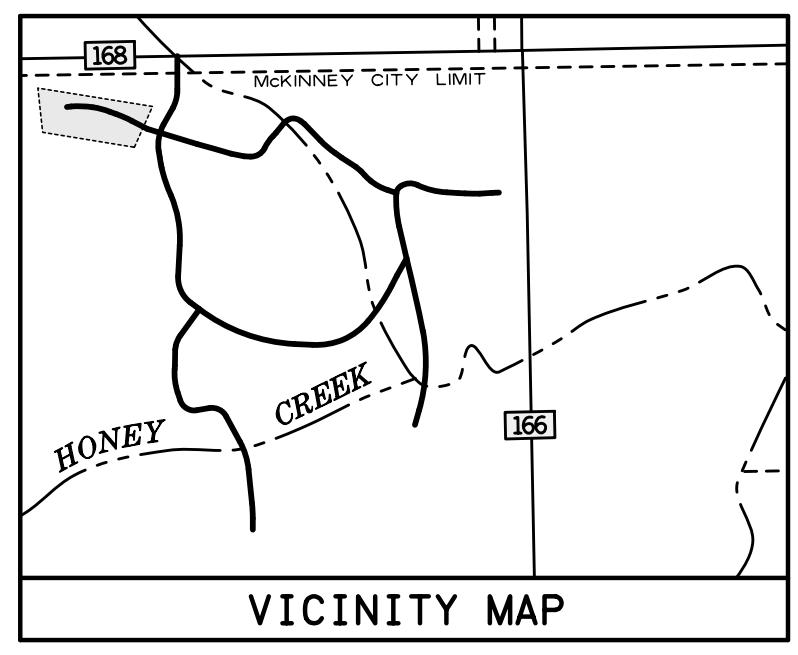

PROJECT NO. 17006.00
DATE: 10/12/2018
SCALE: AS SHOWN
DESIGNED BY: CCG
DRAWN BY: CCG
CHECKED BY: CCG

ROADWAY
PLAN & PROFILE
PARK ROAD "A"

18

CIVIL
CONSULTING
GROUP
TEXAS REGISTERED ENGINEERING FIRM NO. F-9356
1575 HERITAGE DRIVE, STE. 308
MCKINNEY, TEXAS 75069
P 972.569.9193 F 972.569.9197

MYERS PARK
COLLIN COUNTY, TEXAS

10/15/18
DATE
TLC
BY
REVISION
APPENDUM NO. 1

10/15/18
DATE
TLC
BY
REVISION
APPENDUM NO. 1

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
100	T-100	56.55	STA	PREPARING ROW Complete in Place, for the Sum of _____ Dollars _____ Cents per STA		
101	T-104	44	SY	REMOVING CONC (PAV) Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
102	N 203.4	3316	CY	EXCAVATION (ROADWAY) Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
103	N 203.7	1384	CY	EMBANKMENT (FINAL)(ORD COMP)(TY B) Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
104	N 202.2	1138	CY	FURNISHING AND PLACING TOPSOIL Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
105	N 202.5	10098	SY	BLOCK SODDING Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
106	N 301.5	587	SY	FL BS (CMP IN PLC)(TY D GR 1-2) (6") Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
107	T-305	15995	SY	SALV, HAUL & STKPL RCL APH PV (0 TO 2") Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
108	N 303.2	18089	SY	REINF CONC PVM (6") Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
109	N 803.3	173	SY	RIPRAP (CONC)(4 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
110	N 803.3	94	CY	RIPRAP (STONE COMMON)(DRY)(18 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
111	N 803.3	31	CY	RIPRAP (STONE) (COLORADO RIVER ROCK 4"-8")(SPECIAL) Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
111A	N 803.3	7	CY	RIPRAP (CONC)(FLUME) Complete in Place, for the Sum of _____ Dollars _____ Cents per CY		
112	N 801.3	710	LF	PIPE RAIL Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
113	N 801.3	163	LF	DOUBLE PIPE RAIL Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
114	N 501.11	128	LF	CMP (GAL STL 18 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
115	N 501.11	58	LF	CMP (GAL STL 24 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
116	N 501.11	156	LF	CMP (GAL STL 30 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
117	N 501.11	22	LF	CMP (GAL STL 42 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
118	N 501.11	124	LF	CMP (GAL STL 48 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
119	N 501.11	40	LF	CMP (GAL STL 15 IN) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
120	N 501.12	2	EA	SET (TY II) (24 IN) (CMP) (6: 1) (C) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
121	N 203	213	LF	REMOV STR (PIPE) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
122	N 203	1057	LF	REMOVE STR (RAIL) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
123	N 203	117	LF	REMOV STR (FENCE) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
124	T 500	1	LS	MOBILIZATION Complete in Place, for the Sum of _____ Dollars _____ Cents per LS		
125	N 801.1	6	MO	BARRICADES, SIGNS AND TRAFFIC HANDLING Complete in Place, for the Sum of _____ Dollars _____ Cents per MO		
126	N 201.9	137	LF	ROCK FILTER DAMS (INSTALL) (TY 2) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
127	N 201.9	137	LF	ROCK FILTER DAMS (REMOVE) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
128	N 201.5	1362	LF	TEMP SEDMT CONT FENCE (INSTALL) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
129	N 201.5	1362	LF	TEMP SEDMT CONT FENCE (REMOVE) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
130	N 305.1	2154	LF	CONC CURB (INTEGRAL) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
131	N 305.1	98	LF	CONC CURB & GUTTER (SLOTTED) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
132	N 303	3	EA	CONC WHEEL STOP Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
133	N 305.2	31	SY	CONC SIDEWALKS (4") Complete in Place, for the Sum of _____ Dollars _____ Cents per SY		
134	N 305.2	1	EA	CURB RAMPS (TY 7) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
135	N 203	6	EA	REMOVE GATE Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
136	N 801.3	8	EA	INSTALL GATE Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
137	T-644	2	EA	INSTALL SMALL ROADSIDE SIGN ASSM Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
138	T-666	2	EA	REFL PAV MRK TY II (W) (SYMBOL) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		

SECTION 004100 - CONTRACT BID SCHEDULE
MYERS PARK ROADWAY AND PARKING LOT IMPROVEMENTS
ADDENDUM NO. 1

ITEM NO.	SPEC. NO.	ESTIMATED QUANTITY	UNIT	DESCRIPTION WITH UNIT PRICES WRITTEN IN WORDS	UNIT PRICE (\$)	AMOUNT BID (\$)
139	T-666	7151	LF	REFL PAV MRK TY II (W) 4" (SLD) Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
140	T-666	298	LF	ELIM EXT PAV MRK & MRKS (4") Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
141	T-678	6853	LF	PAV SURF PREP FOR MRK (4") Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		
142	T-678	2	EA	PAV SURF PREP FOR MRK (SYMBOL) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
143	N 202.1	1	EA	TREE REMOVAL (24" - 30" DIA) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
144	N 202.1	1	EA	TREE REMOVAL (36" - 42" DIA) Complete in Place, for the Sum of _____ Dollars _____ Cents per EA		
145	N 202.1	1224	LF	TREE PROTECTION Complete in Place, for the Sum of _____ Dollars _____ Cents per LF		

SUBTOTAL AMOUNT BID FOR MATERIALS AND SERVICES,
ITEMS 100 THROUGH ITEMS 145, INCLUSIVE.

\$ _____

N XXX: Refers to the Fifth Edition of the Public Works Construction Standard Specifications - North Central Texas Council of Governments.

T XXX: Refers to TxDOT Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges, November 2014.



MANDATORY PRE-BID MEETING SIGN-IN SHEET

Project:	IFB 2018-336, Construction, Road: Myers Park Roadway Improvements	Meeting Date:	10/11/2018
Facilitator:	Matt Dobecka, CPPO, CPPB, CPCP Collin County Purchasing	Place/Room:	Myers Park "The Landing"


Name	Company	Phone	E-Mail
Matt Jeske	Jeske Construction	972-620-2248	Matt@JeskeConstruction.com
Angelica Gonzalez	Cidra Texas LLC	817-510-3004	cidrax@cidraxtexas.com
Oswaldo Gonzalez	McMorrow Contracting	972-263-6907	will@McMorrowContracting.com
Telli Katorycz	Pavecon Public Works LP	972-263-3223	TOLLKE@Pavecon.com
Abdul Olisa	Mario Sinacola	469-881-6955	201isa@marcosinacola.com
Diego Jimenez	Mario Sinacola & Sons Excavating	214-387-3900	sinacolaengineering@mariosinacola.com
DOUG TETER	ED Bell Construction	214-358-6581	ESTIMATOR6@EDBELLCONSTRUCTION.COM
Zach Kesler	Urban Infrastructure	682-227-7056	Zach@urbanconstruct.com
Mark Gonzalez	EJ Smith Const.	469-206-7733	mgonzalez@ejsmithind.com
Matt Patchin	FNH construction, LLC	469-248-0301	matt@FNHconstruction.com
Chase Smith	AMX Construction LP	214-564-7584	chase.smith@amxconstruction.com
Belissa Betances	RBR Infrastructure & Road, LLC	214-389-2900	rafybetances@rbr-llc.com



MANDATORY PRE-BID MEETING SIGN-IN SHEET

Project:	IFB 2018-336, Construction, Road: Myers Park Roadway Improvements	Meeting Date:	10/11/2018
Facilitator:	Matt Dobecka, CPPO, CPPB, CPCP Collin County Purchasing	Place/Room:	Myers Park "The Landing"

Name	Company	Phone	E-Mail
Chase Sewell	ZL Construction, LLC	940-577-1405	Chase@ZLconstruction.com
Joshua Booker	DDM Construction Corp.	940-217-5751	estimators@ddmcc.net
Grant Brown	Tisco Paving	469-223-6629	Gbrown@TiscoPaving.com
JEFF DURHAM	Collin Co	972-548-3723	jdurham@collincountytexas.gov
Mark Page	Collin Co.	972-548-4792	mpage@collincountytexas.gov
TREVOR CASTILLA	Civil Consulting Group	972-569-9193	tcastilla@civilgroup.net
Katie Hames	Civil Consulting Group	972-569-9193	khames@civilgroup.net
Matt DOBECKA	Collin Co.	972-548-4103	mdobecka@co.collin.tx.us

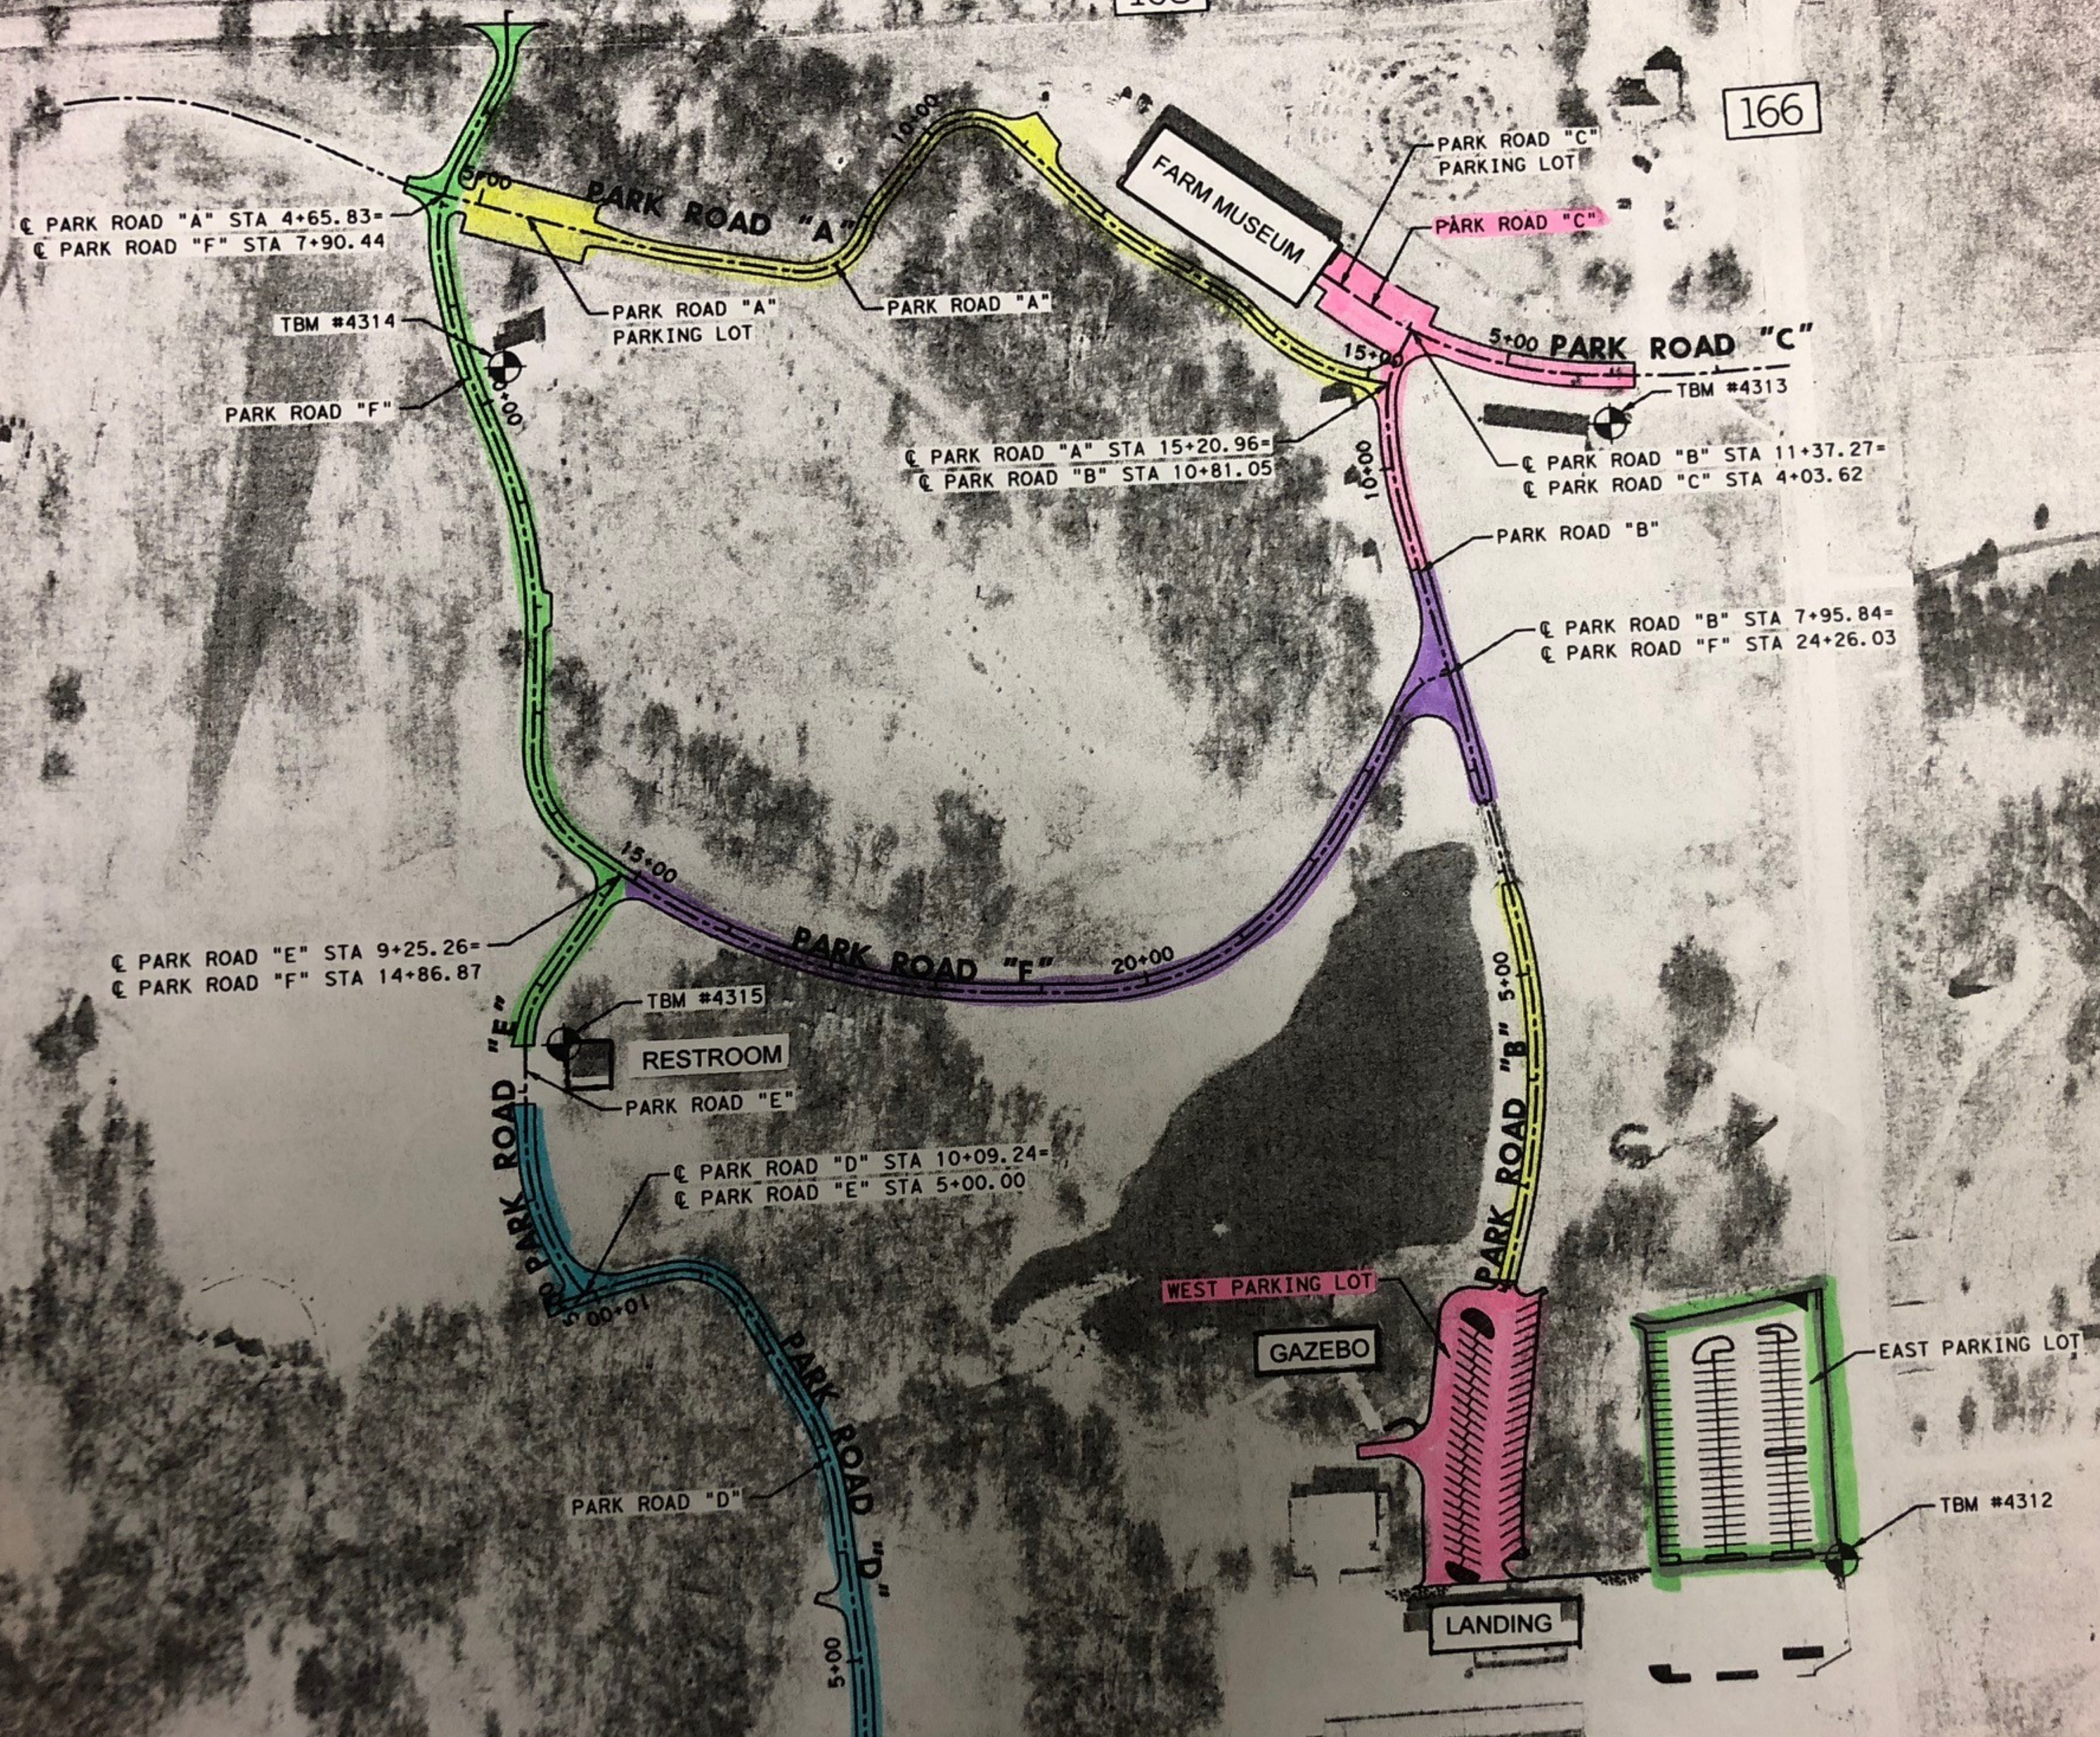

CONSTRUCTION SEQUECE

PHASE I

January 14 thru March 8, 2019 (54 Calendar Days)

Park Road C, Northern 200 LF of Park Road B and West Parking Lot

Park Road C including parking area east of the Farm Museum needs to be complete and open to vehicle traffic FIRST.

West Parking Lot and northern 200 LF of Park Road B needs to be complete, but does not need to be open to traffic. Sod should be in place, striping complete by 5/3/2019.

PHASE II

March 11 thru May 8, 2019 (59 Calendar Days)

Park Road E - north of Restroom Parking (200 LF) and Park Road F from Park Road E north to CR 168

PLUS

Additional Section #1 Remainder of Park Road E – south of Restroom Parking and Park Road D

OR

Additional Section #2 Remainder of Park Road F – east of Park Road E connecting with completed section of Park Road B

Phase II work and either additional options (#1 or #2) must be fully completed and open to traffic

PHASE III

Begin any time after May 13, 2019

East Parking Lot

PHASE IV

Begin any time after June 24, 2019

Either Additional Options ONE or TWO not completed In PHASE II

ANYTIME WORK

Park Road A or the southern 400 LF section of Park Road B

Note: Either the eastern or western entrance to the Farm Museum must remain accessible at all times During construction.